

# AUTOMATIC GILGEN FOLDING DOOR FFM

## The comfortable solution for situations where space is tight

### Attractive with minimum space requirement

Folding is synonymous with making room. While requiring a minimum of installation space, automatic Gilgen folding doors offer you a maximum clearance width.

### A permanent solution

The most up-to-date and well-proven componentry modules guarantee optimal user comfort, a high availability and first-class quality.

### Fast and safe

An unimpeded passage as well as maximum safety are requirements which are easily fulfilled by the Gilgen folding door.

### Ease of adaptation

A wide choice of construction sizes, surface treatments and glass versions allows realizing a custom-tailored solution which perfectly matches the architectural concept.

### User-friendly

The complete range of selectable functions and available control and safety elements enables you to find the optimal solution for your situation.





Automatic Gilgen folding door FFM for the maximum possible opening, even when space is limited.



## Automatic Gilgen folding door FFM - Installation possibilities into the architectural concept

### Basic data

Clear opening width LB	800 - 1600 mm
Length of header profile A	LB + 260 mm
Header profile	200 x 250 mm
Clear height LH	up to 2500 mm
Depth in the open position E	315 - 515 mm
Max. door leaf weight	70 kg per folding door leaf

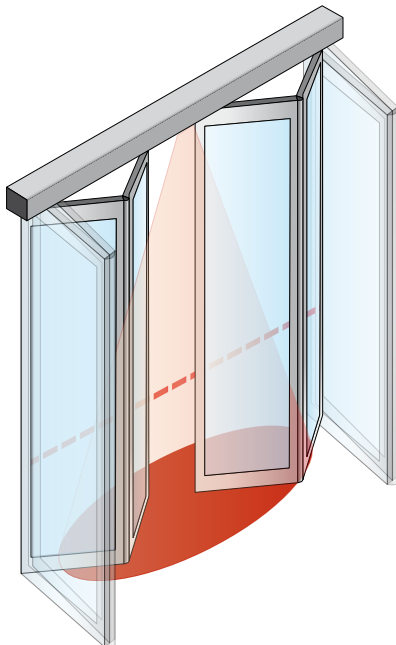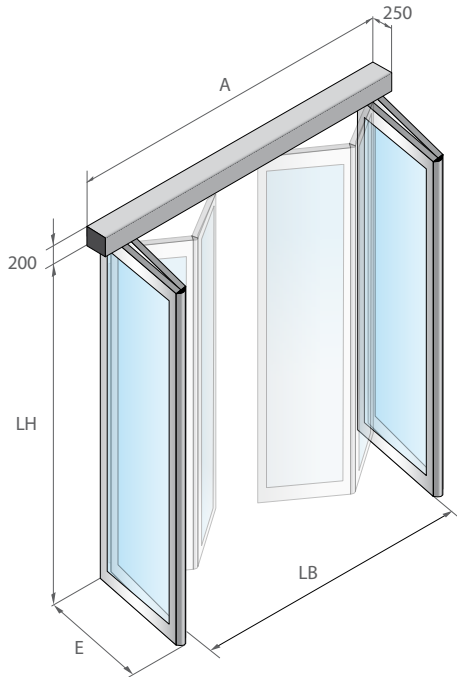

### Glass versions

Within the limits of the folding door leaf weight, you can select among a wide range of glass types and thicknesses:

Clear width	Glass thickness		
	Safety glass	Insulating glass	
	ESG	VSG	IV 5/6/5
800 - 1300 mm	10	10/14/16	16
1400- 1500 mm	10	10/14	16
1600 mm	10	10	16

### Available functions

Adjustable speed	0,5 - 0,7 m/s
Electronic control panel Bedis	yes
Auto-reverse safety mechanism	yes
Safety stop mechanism	yes
Battery-powered (24 V) emergency mode	possible (optional)
Systematic locking	yes
Additional locking of folding door leaf points	
with monitoring	possible (optional)
Flush bottom guide rail	possible (optional)
Manual unlocking inside	yes
Manual unlocking outside	possible (optional)

### Technical data

Mains power supply	
(from customer-supplied outlet)	230 V, 50/60 Hz, 13 A
Mains cable	length 4 m
Power consumption	200 W
Static drive power	max. 150 N
Ambient temperature	between -15 and + 75°C

Motion detectors offer a contactless entrance. Further control elements as push-buttons, pull switches or contact carpets can be connected according to the situation.

By means of the program switch Bedis you can select the door functions „Manual-Automatic-Open-Night-Exit“.

Light barriers / scanning safety beam and auto-reverse mechanism make sure one can enter safely.

# SMS<sup>®</sup>

ENDÜSTRİYEL İÇ ve DIŞ TİCARET LTD. ŞTİ.  
Hoşdere Cad. Şehit Mahir Turan Sok. No:3 06540 Ayrancı/Ankara  
Tel:(0312) 442 28 00-01 Fax: 0312 442 28 03  
e-mail: info@sms.com.tr