

Transpalock 900



**BOON EDAM**

The Transpalock 900 is the most elegant tripod turnstile available today. Three glass door wings around a stainless steel column provide a beautiful entry. Its transparency ensures that the Transpalock 900 complements virtually any interior design.

Options


- Single lane or multiple lane set-up
- Push & Go operation
- External control panel
- Card reader mounting options
- Custom handrails
- Plinth mounted

SMS[®]
ENDÜSTRİYEL İÇ ve DIŞ TİCARET LTD. ŞTİ.


 *your entry experts*



Dimensions and Specifications

A	B	C	D	E				
Passage Width (mm)	Capacity / Minute*	# of Door Wings	Disabled Access	Type of Traffic	Overall Width (mm)	Throat Opening (mm)	Door Wing Height (mm)	Overall Height (mm)
616	15	3	x		1600	710	1000	1100

* Depending on access control system, in one direction

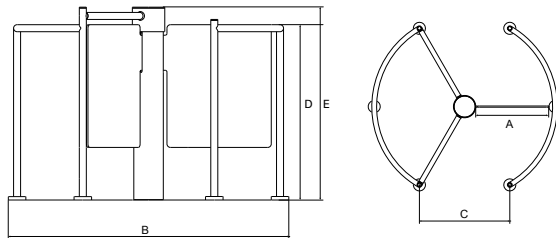

Access Control Integration

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system. Card readers, fingerprint readers or other authorisation systems can be integrated in the column of the Transpalock 900 itself or on an optional secondary pedestal or column that can be placed in the vicinity of the gate itself. This allows for a more fluid entry process.

Emergency Egress

The Transpalock 900 is fail-safe, ensuring the lock and motor will disengage in the event of a power failure to allow free passage.

BoonTouch

Boon Edam offers a universal control panel to operate its security access solutions remotely from a reception or security desk. This control panel is able to operate any combination of up to 6 security access solutions and is compatible with most of the solutions in our product range. Its user friendly interface allows for each solution to be operated separately or all at the same time. Moreover the BoonTouch will show any alarm situation at the lane directly at the reception or security desk.

Technical Specifications

Power Supply: 200-240 VAC, 50/60 Hz

Power Consumption

Operating: 20W

Stationary: 60W

Ambient Temperature: -20°C to +50°C

Weight: 118 kg